



SRK25ZS-WFT / SRC25ZS-W2

2.5(0.9~3.1)

Indoor Unit : SRK25ZS-WFT

Outdoor Unit : SRC25ZS-W2

Specifications




R32

Indoor unit			SRK25ZS-WFT	
Outdoor unit			SRC25ZS-W2	
Power source			1Phase, 220 - 240, 50Hz	
Nominal cooling capacity (Min~Max)		kW	2.5(0.9~3.1)	
Nominal heating capacity (Min~Max)		kW	3.2(0.9~4.5)	
Power consumption	Cooling/Heating	kW	0.62 / 0.74	
EER/COP	Cooling/Heating		4.03 / 4.32	
Max. running current		A	9	
Sound power level	Indoor	Cooling/Heating		50 / 53
	Outdoor	Cooling/Heating		56 / 58
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)	dB(A)	36 / 28 / 23 / 19
		Heating (Hi/Me/Lo/Ulo)		39 / 30 / 24 / 19
	Outdoor	Cooling/Heating		46 / 46
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo)	m3/min	9.9 / 8.0 / 5.9 / 5.0
		Heating (Hi/Me/Lo/Ulo)		11.3 / 8.7 / 6.7 / 5.9
	Outdoor	Cooling/Heating		27.4 / 23.6
Exterior Dimensions	Indoor	Height x Width x Depth	mm	290 x 870 x 230
	Outdoor			540 x 780(+62) x 290
Net weight	Indoor / Outdoor		kg	9.5 / 31.0
Refrigerant		Type/GWP		R32 / 675
Refrigerant		Charge	kg/TCO2Eq	0.62 / 0.419
Refrigerant piping size		Liquid/Gas	mm (ø inch)	6.35(1/4") / 9.52(3/8")
Refrigerant line (one way) length		m	Max. 20	
Vertical height differences		Outdoor is higher/lower	m	Max. 10 / Max. 10
Outdoor operating temperature range	Cooling		°C	-15~46
	Heating			-15~24
Clean filter			Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1	
Energy Class (Cooling/Heating)			A+++/A++	
SEER			8.50	
SCOP (Average climate)			4.70	
Pdesign (cooling/heating(@-10°C))		kW	2.50/2.70	
Annual Electricity Consumption (cooling/heating)		kWh/a	103/804	
Designated Heating Season			Average	

- The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
- Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
- 'tonne(s) of CO2 equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.
- SEER/SCOP are based on EN14825:2016 and Commission regulation (EU) No.2016/2281

Schematics

SRK20ZS-WF, -WFB, -WFT, -W
 SRK25ZS-WF, -WFB, -WFT, -W
 SRK35ZS-WF, -WFB, -WFT, -W
 SRK50ZS-WF, -WFB, -WFT, -W
 SRK20ZS-S, -SB, -ST SRK25ZS-S, -SB, -ST
 SRK35ZS-S, -SB, -ST SRK50ZS-S, -SB, -ST

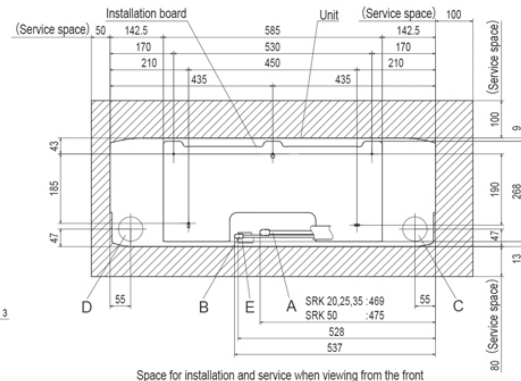



Space for installation and service when viewing from the front

Symbol	Content
A	Gas piping SRK20, 25, 35 $\phi 9.52$ (3/8") (Flare) SRK50 $\phi 12.7$ (1/2") (Flare)
B	Liquid piping SRK20, 25, 35 $\phi 6.35$ (1/4") (Flare) SRK50 $\phi 9.52$ (3/8") (Flare)
C	Hole on wall for right rear piping ($\phi 65$)
D	Hole on wall for left rear piping ($\phi 65$)
E	Drain hose VP16
F	Outlet for piping (on both side)

Outdoor units

SRC20ZS-W, 25ZS-W, 35ZS-W
 SRC25ZS-W1, 35ZS-W1
 SRC25ZS-W2, 35ZS-W2

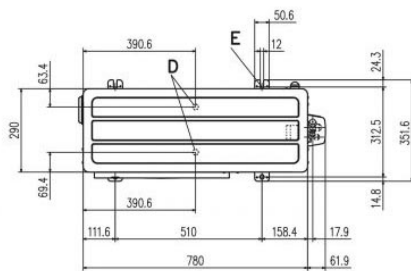

Symbol	Content
A	Service valve connection (gas side) $\phi 9.52$ (3/8") (Flare)
B	Service valve connection (liquid side) $\phi 6.35$ (1/4") (Flare)
C	Pipe/cable draw-out hole $\phi 20 \times 2$ places
D	Drain discharge hole M10 $\times 4$ places
E	Anchor bolt hole

Minimum installation space				
Examples of installation Dimensions				
	I	II	III	IV
L1	Open	280	280	180
L2	100	75	Open	Open
L3	100	80	80	80
L4	250	Open	250	Open

