



SRK35ZT-WFB / SRC35ZT-W(B)

3.5(0.9~ 4.0)

Indoor Unit : SRK35ZT-WFB

Outdoor Unit : SRC35ZT-W(B)

Specifications


R32

Indoor unit			SRK35ZT-WFB	
Outdoor unit			SRC35ZT-W(B)	
Power source			1Phase, 220 - 240, 50Hz	
Nominal cooling capacity (Min~Max)		kW	3.5(0.9~ 4.0)	
Nominal heating capacity (Min~Max)		kW	4.0(0.9~5.0)	
Power consumption	Cooling/Heating	kW	0.88 / 0.91	
EER/COP	Cooling/Heating		3.98 / 4.40	
Max. running current		A	9	
Sound power level	Indoor	Cooling/Heating		52 / 55
	Outdoor	Cooling/Heating		62 / 61
Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)	dB(A)	38 / 30 / 26/ 19
		Heating (Hi/Me/Lo/Ulo)		40 / 36 / 25 / 19
	Outdoor	Cooling/Heating		50 / 48
Air flow	Indoor	Cooling (Hi/Me/Lo/Ulo)	m3/min	10.0 / 8.6 / 6.3 / 5.0
		Heating (Hi/Me/Lo/Ulo)		11.3 / 10.0 / 6.7 / 5.3
	Outdoor	Cooling/Heating		29.9 / 26.4
Exterior Dimensions	Indoor	Height x Width x Depth	mm	290 x 870 x 230
	Outdoor			540 x 780 (+62) x 290
Net weight	Indoor / Outdoor		kg	11.0 / 33.5
Refrigerant		Type/GWP		R32 / 675
Refrigerant		Charge	kg/TCO2Eq	0.81 / 0.547
Refrigerant piping size		Liquid/Gas	mm (ø inch)	6.35(1/4") / 9.52 (3/8")
Refrigerant line (one way) length		m	Max. 20	
Vertical height differences		Outdoor is higher/lower	m	Max. 15 / Max. 15
Outdoor operating temperature range	Cooling		°C	-15~50
	Heating			-20~24
Clean filter			Allergen Clear Filter x 1, Photocatalytic Washable Deodorizing Filter x 1	
Energy Class (Cooling/Heating)			A+++ / A++	
SEER			8.7	
SCOP (Average climate)			4.9	
Pdesign (cooling/heating(@-10°C))		kW	3.50/3.00	
Annual Electricity Consumption (cooling/heating)		kWh/a	141/858	
Designated Heating Season			Average	

- The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
- Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
- 'tonne(s) of CO2 equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.
- SEER/SCOP are based on EN14825:2016 and Commission regulation (EU) No.2016/2281




Schematics

SRK20ZT-WF, -WFB, -WFT
SRK25ZT-WF, -WFB, -WFT
SRK35ZT-WF, -WFB, -WFT
SRK50ZT-WF, -WFB, -WFT

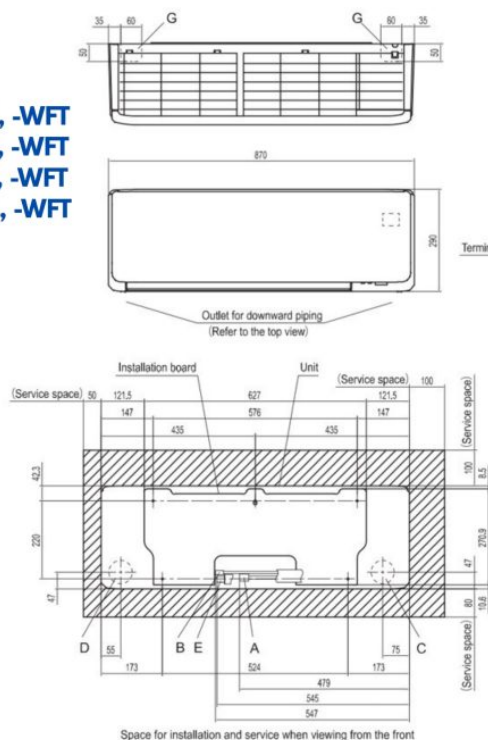


Symbol	Content
A	Gas piping
	SRK 20,25,35 $\phi 9.52$ (3/8") (Flare)
B	Liquid piping
	SRK 50 $\phi 12.7$ (1/2") (Flare)
C	Hole on wall for right rear piping
D	Hole on wall for left rear piping
E	Drain hose
F	Outlet for wiring (on both side)
G	Outlet for piping (on both side)

Wired remote control
(Option)




Wireless remote control



Notes (1) The model name label is attached on the right side of the indoor unit.
 (2) To connect the wired remote control, the interface kit (SC-BIKN2-E or SC-BIKN2-BL) are required. SC-BIKN2-E is externally mounted interface unit. SC-BIKN2-BL is internally mounted interface unit.

Unit:mm

SRC20ZT-W, -WB SRC25ZT-W, -WB SRC35ZT-W, -WB

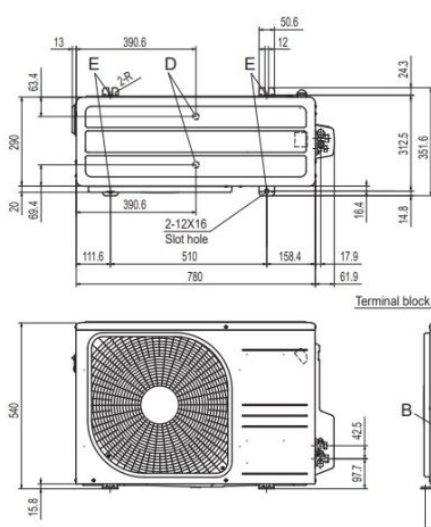

Symbol	Content
A	Service valve connection (gas side)
B	Service valve connection (liquid side)
C	Pipe/cable draw-out hole
D	Drain discharge hole
E	Anchor bolt hole

	Installation space
L1	280 or more
L2	100 or more
L3	80 or more
L4	250 or more

Notes

- (1) The unit must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) If the unit is installed in the location where there is a possibility of strong winds, place the unit such that the direction of air from the outlet gets perpendicular to the wind direction.
- (4) Leave 200mm or more space above the unit.
- (5) The wall height on the outlet side should be 1200mm or less.
- (6) The model name label is attached on the right side of the unit.

